

## PAINTING PROCEDURE if Installing Primed Spoiler Only

- We recommend you to have the painting performed at an authorised Mitsubishi Motors dealer.

- 1) Lightly scuff the exterior surface of the primed spoiler with a scotch-bright pad.
- 2) Use a solvent wipe, like Prepsol or Isopropyl Alcohol, to clean the spoiler before spray painting.
- 3) Use the vehicles paint code to colour match the paint.
- 4) Mask the threaded mounting holes & Stud threads of the Spoiler.
- 5) Spray paint the spoiler.




### Caution

Oven baking is allowed.  
To prevent damage to the spoiler, do not exceed 60°C.

- 6) When the spoiler is dry, check for painting defects. Correct as necessary.
- 7) Check the 2 drainage holes at the bottom and both outside edges of the spoiler, is free of paint. Unblock if required.
- 8) Remove the masking from the mounting threaded holes and Stud threads.
- 9) Confirm the final spoiler paint colour matches the vehicle colour. Correct as necessary.

## INSTALLATION PROCEDURES

### A. REMOVING TRUNK LID TRIM (if fitted)

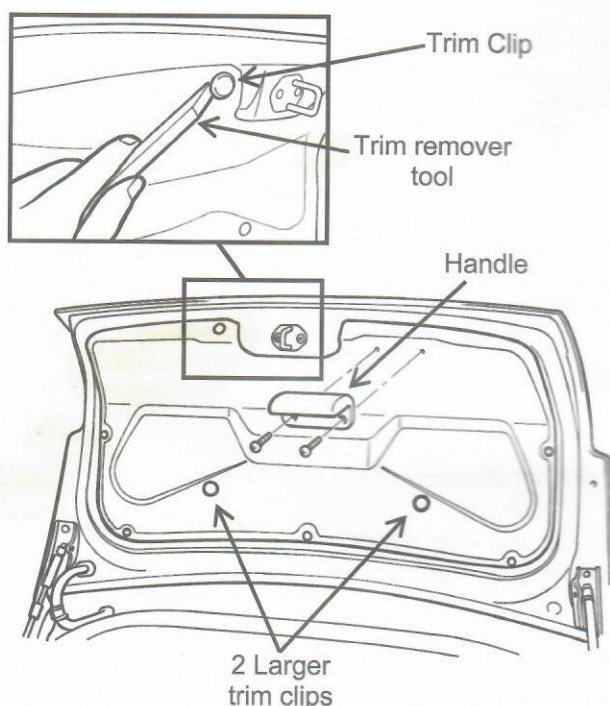

This procedure is only applicable for vehicles fitted with trunk trim.



### Caution

The removed parts will be reused for reassembly. Do not lose them.

- 1) Open the trunk lid.  
If handle is fitted, remove the screws and remove the handle. (note: not all models will have this handle fitted)
- 2) Remove all of the trim clips using a trim remover tool. Remove trunk trim.



### Note

When replacing the trim after the spoiler is fitted, ensure the 2 larger trim clips are inserted into the original location in the centre of the trim.

Check ☐